

ProLine® & ProLine® Master ELECTRIC

ENERGY SAVINGS

- Meets and exceeds NRCAN energy efficiency standards
- All models meet national energy efficiency requirements
- Styropour® base for added energy efficiency

DESIGNED FOR PERFORMANCE

- ProLine® and ProLine® Master models are residential water heaters with commercial-grade quality
- Factory-installed plastic-lined heat trap nipples
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life
- Thermostatically controlled, long life elements
- Brass drain valve
- CFC-free foam insulation

SERVICEABILITY


- Conveniently located T&P and drain valve for ease of installation and serviceability
- CoreGard™ magnesium anode with a stainless steel core protects the tank against corrosion

DynaClean™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup, maximizes hot water output and is made from long-lasting PEX cross-linked polymer

WARRANTY

- 6 year limited tank and parts warranty on ProLine® models
- 8 year limited tank and parts warranty on ProLine® Master models
- 2 and 4 year tank warranty extension kits are available for 6 year models

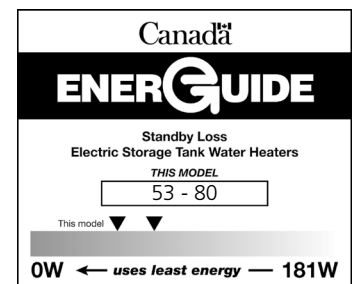

SPECIFICATIONS

MODEL	SERIES	CAPACITY			ELEMENTS (UPPER AND LOWER)		STANDBY LOSS WATTS	ENERGY FACTOR	FIRST HOUR RATING GPH (LPH)	HEIGHT TO TOP OF TANK A IN (CM)	DIAMETER B IN (CM)	SHIPPING WEIGHT LB (KG)	WARRANTY TANK/PARTS YEARS
		IG	USG	LITRES	WATTS	VOLTS							
TOP ENTRY													
EPSX 50	250	40	50	182	3000	208	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	3000+	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	3800++	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	4500	208	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	4500+++	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	5500	208	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
EPSX 50	250	40	50	182	6000++++	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	6/6
ECT 80	250	60	80	287	3000	208	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	3000+	240	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	3800++	240	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	4500	208	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	4500+++	240	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	5500	208	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
ECT 80	250	60	80	287	6000++++	240	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
TOP ENTRY													
HPSX 50*	250	40	50	182	3000+	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	8/8
HPSX 50*	250	40	50	182	3800++	240	53	0.92	60 (227)	48 ¾ (124)	22 (56)	125 (57)	8/8
HCT 80*	250	60	80	287	4500+++	240	78	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	8/8
BOTTOM ENTRY													
EJSH 50	250	40	50	182	3000	208	65	0.91	60 (227)	48 (122)	22 (56)	122 (55)	6/6
EJSH 50	250	40	50	182	3000+	240	65	0.91	60 (227)	48 (122)	22 (56)	122 (55)	6/6
EJSH 50	250	40	50	182	4500	208	65	0.91	60 (227)	48 (122)	22 (56)	122 (55)	6/6
EJSH 50	250	40	50	182	4500++	240	65	0.91	60 (227)	48 (122)	22 (56)	122 (55)	6/6
EJTH 80	250	60	80	287	3000	208	80	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
EJTH 80	250	60	80	287	3000+	240	80	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
EJTH 80	250	60	80	287	4500	208	80	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6
EJTH 80	250	60	80	287	4500++	240	80	0.90	81 (307)	60 ½ (154)	24 (61)	170 (77)	6/6




*Model has incoloy elements. All models comply with national energy efficiency regulations.

*Model is dual-rated. At 208V wattage is 2253.

**Model is dual-rated. At 208V wattage is 2854.

***Model is dual-rated. At 208V wattage is 3380.

****Model is dual-rated. At 208V wattage is 4507.

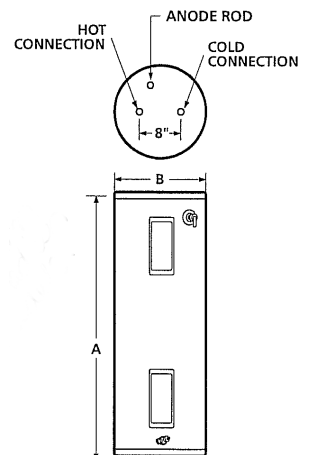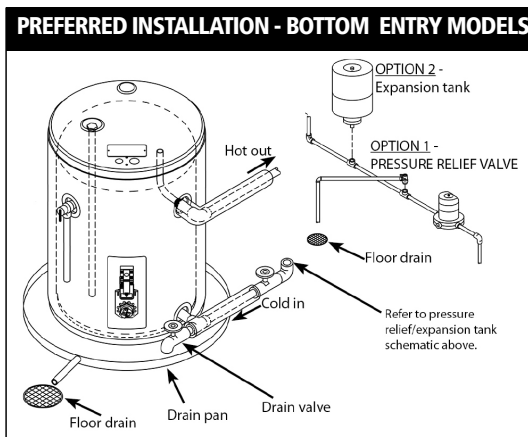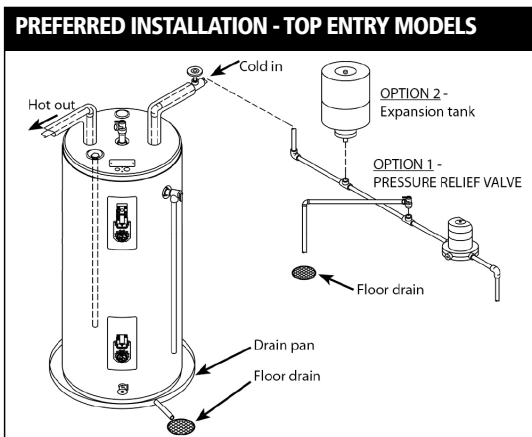

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.